

# Photometrics Pro

## Luminaire Photometric Report

**Filename:** HTS-8R-Double

**Manufacturer:** BARE DEVELOPMENT

**Luminaire:** DOUBLE LIGHT BOARD LED 173W INPUT

**Luminaire Cat:** Double HTS-8R

**Lamp:** 72 LED'S

**Lamp Cat:** NA. LUMINAIRE OUTPUT = 15200.2 LMS

**Lamp Output:** 1 lamp(s), rated Lumens/lamp: 15200.2

**Max Candela:** 4,839.6 at Horizontal: 0°, Vertical: 0°

**Input Wattage:** 173

**Luminous Opening:** Rectangle (L: 0.25m, W: 0.18m)

**Test:** SCALED


**Test Lab:** Intertek

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Full Cutoff

**Nema Type:** 7 X 7

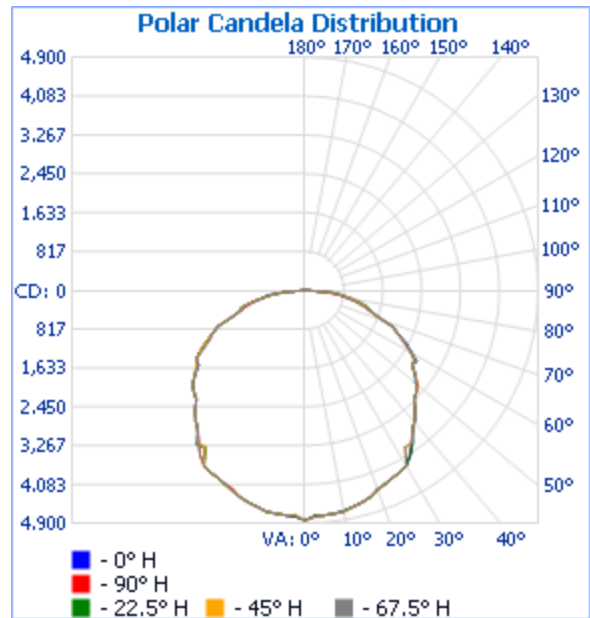


### Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	3,770.2	24.8%	24.8%
0-40	6,204.3	40.8%	40.8%
0-60	11,257.5	74.1%	74.1%
60-90	3,939.7	25.9%	25.9%
0-90	15,197.2	100%	100%
90-180	0	0%	0%
0-180	15,197.2	100%	100%

### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	452.5	3.0%	90-100	0	0%
10-20	1,302.9	8.6%	100-110	0	0%
20-30	2,014.9	13.3%	110-120	0	0%
30-40	2,434.1	16.0%	120-130	0	0%
40-50	2,542.0	16.7%	130-140	0	0%
50-60	2,511.3	16.5%	140-150	0	0%
60-70	2,115.9	13.9%	150-160	0	0%
70-80	1,362.4	9.0%	160-170	0	0%
80-90	461.4	3.0%	170-180	0	0%

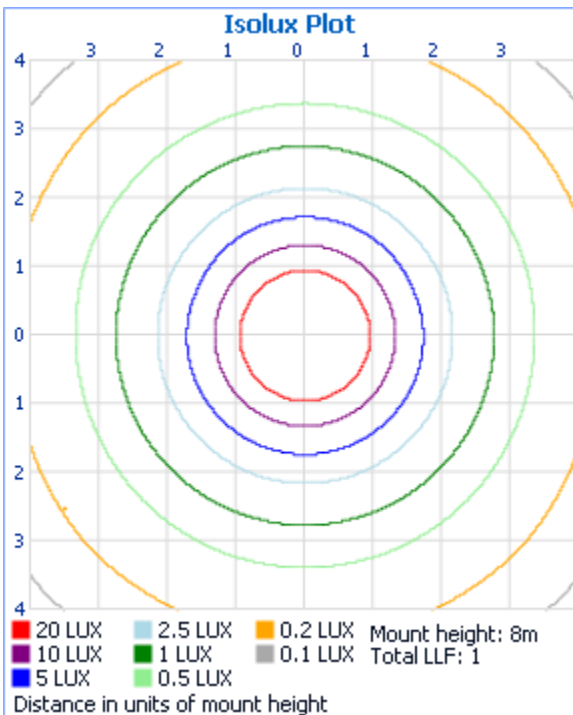

Distance (m)	Illuminance at a Distance	
	Center Beam LUX	Beam Width
1.3m	2,722.28 LUX	5.0m x 4.9m
2.7m	680.57 LUX	10.0m x 9.8m
4.0m	302.48 LUX	14.9m x 14.7m
5.3m	170.14 LUX	19.9m x 19.7m
6.7m	108.89 LUX	24.9m x 24.6m
8.0m	75.62 LUX	29.9m x 29.5m

Vert. Spread: 123.7°    Horiz. Spread: 123.0°

### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	<b>80</b>	<b>70</b>	<b>50</b>	<b>30</b>	<b>10</b>	<b>0</b>									
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	0

RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.08	1.02	.98	.94	1.05	1.00	.96	.82	.96	.92	.89	.92	.89	.86	.88	.86	.84	.82
2	.97	.88	.81	.75	.95	.86	.80	.68	.83	.77	.72	.80	.75	.71	.76	.72	.69	.67
3	.88	.77	.68	.61	.86	.75	.67	.57	.72	.65	.60	.70	.64	.59	.67	.62	.58	.55
4	.81	.68	.59	.52	.78	.67	.58	.49	.64	.56	.50	.62	.55	.50	.59	.54	.49	.47
5	.74	.60	.51	.44	.72	.59	.50	.42	.57	.49	.43	.55	.48	.43	.53	.47	.42	.40
6	.68	.54	.45	.38	.66	.53	.44	.37	.51	.44	.38	.50	.43	.37	.48	.42	.37	.35
7	.63	.49	.40	.34	.61	.48	.40	.33	.47	.39	.33	.45	.38	.33	.44	.38	.33	.31
8	.59	.45	.36	.30	.57	.44	.36	.29	.43	.35	.30	.41	.34	.29	.40	.34	.29	.27
9	.55	.41	.33	.27	.53	.40	.32	.26	.39	.32	.27	.38	.31	.26	.37	.31	.26	.24
10	.51	.38	.30	.24	.50	.37	.29	.24	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22

**Luminaire Report Summary**

IESNA:LM-63-2002  
 [TEST] SCALED  
 [TESTLAB] Intertek  
 [ISSUEDATE] 7/19/2010  
 [MANUFAC] BARE DEVELOPMENT  
 [LUMCAT] Double HTS-8R  
 [LUMINAIRE] DOUBLE LIGHT BOARD LED 173W INPUT  
 [LAMP] 72 LED'S  
 [LAMPCAT] NA. LUMINAIRE OUTPUT = 15200.2 LMS  
 [OTHER] DRIVER OUTPUT 24.005V, 6.3572A, 185.70W  
 [OTHER] TEST PROCEDURE: IESNA LM-79-08  
 FILE: CANDELA MULTIPLIER: 1  
 FILE: VERTICAL ANGLES: 73, HORIZONTAL ANGLES: 17  
 FILE: COORDINATE SYSTEM: TYPE C  
 FILE: UNIT OF MEASURE: STANDARD  
 FILE: BALLAST FACTOR: 1

Photometrics Pro 1.3.9 copyright 2003-2009 by jSolutions, Inc.  
 Reported data calculated from manufacturer's data file, based on IES recommended methods.