

**HTS Series Garage Light**  
**Energy Efficient LED Lighting**  
**70-320 Watt Replacement**

**FEATURED HIGHLIGHTS**

- \*Unlimited application possibilities due to retrofitting
- \*Saves up to 79% of energy consumption
- \*100,000 hour lifespan 5yr. Manufacturers registered warranty
- \*Return on Investment between 18 to 40 months.

**ENVIRONMENTAL FEATURES**

- \*Contains no mercury or lead
- \*Does not produce UV rays
- \*Does not attract insects
- \*Directional light means no light pollution

**ELECTRICAL SPECIFICATIONS**

- \*47 to 63 Hertz ac line power voltage from 90 VAC RMS to 277 VAC RMS
- \*Available to 480 VAC
- \*Nominal operating efficiency is 85% typical at 230 VAC and maximum load
- \*Driver provides surge protection at 305 VAC
- \*Power distributed to onboard drivers per six LED lights

**SPECIFICATIONS**

- \*\*UL and CUL rated #E326977
- \*\*MADE IN THE U.S.A

The HTS Garage light series was specifically designed for low indoor parking garages where a wider spread of light is required. Its superior heat management and compact design make it ideal, 10+ years of maintenance free service.

**OUTPUT SPECIFICATIONS**

- \*Cree High Output LEDs
- \*Number of Lights 12-24
- \*Source power 29-59 watts
- \*CRI 74
- \*Lumens 2533-4327 at 100%
- \*Efficacy 81.85 LM/W
- \*Junction Temperature <60°C
- \*IESNA Tested LM79 & LM80
- \*Operating Range -30°C to 70°C
- \*Nominal Lumens per watt 92
- \*EMC: Complaint to 47 CFR, part 2, 15

**ASSEMBLY**

- \*Metal Core Board
- \*One piece aluminum heat sink dissipates heat
- \*Vibration resistant
- \*ASTM and NEMA Tested


**APPLICATIONS**

- \*Parking Garages
- \*Exterior
- \*Safety
- \*Security

**Dimensions**

Weight: (with power supply) 9ar -12 lbs 9r - 15lbs

12" x12" x 9"

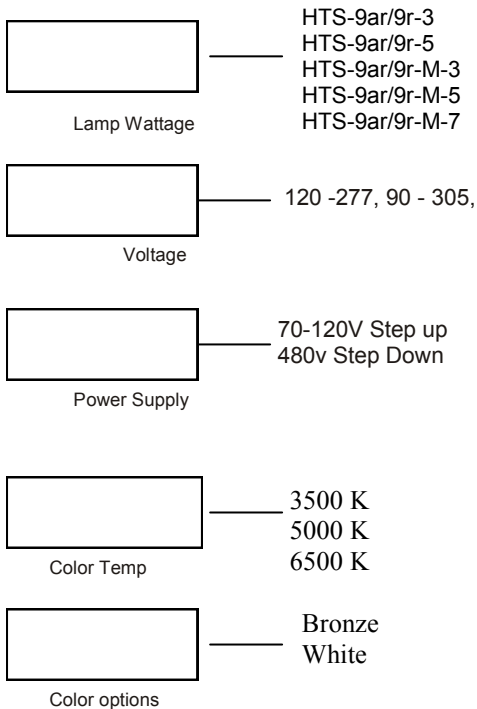

Issue Date: 5/20/11  
 Supersede Date: 4/22/11

